


C.I.P.**243 Win.**

TAB. I

Date 84-06-14

Pays d'origine: US

Révision 02-05-15

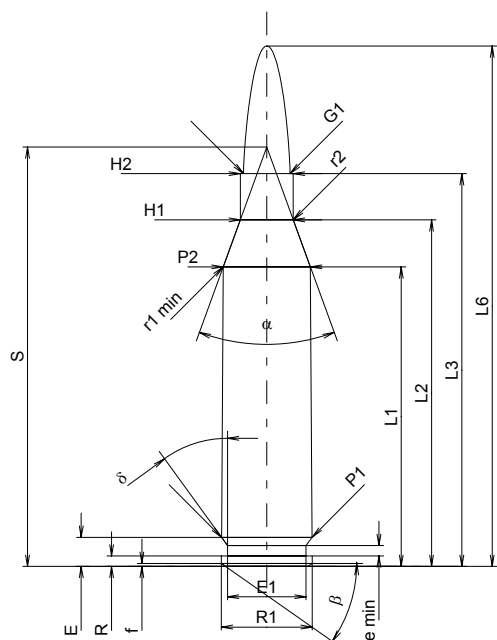**CARTOUCHE MAXI****Longueurs**

L1 ¹⁾	=	39.62	-0.20
L2 ¹⁾	=	45.83	-0.20
L3 ¹⁾	=	51.94	
L4	=		
L5	=		
L6	=	68.83	

Culot

R	=	1.37	
R1	=	12.01	
R3	=		
E	=	3.85	
E1	=	10.39	
e min	=	1.40	
δ	=	36°	
f	=	0.38	
β	=	35°	

Chambre à poudre

P1	=	11.96	
P2 ^{1)*}	=	11.53	-0.20

Cône de raccordement

α [*]	=	40°	
S [*]	=	55.46	
r1 min	=	0.76	
r2	=	3.18	

Collet

H1 [*]	=	7.01	
H2 ¹⁾	=	7.01	

Projectile

G1 ¹⁾	=	6.17	
G2	=		
F	=		
L3+G ¹⁾	=	57.20	

Pressions (Énergies)**Méthode transducteur**

Pmax	=	4150 bar	
PK	=	4773 bar	
PE	=	5190 bar	
M	=	25.00	
EE	=	2890 Joule	

Autres indications

Fe ¹⁾	=	0.10	
delta L	=	0.10	

CHAMBRE MINI**Longueurs**

L1	=	39.48	
L2	=	45.65	
L3 ¹⁾	=	52.20	

Cuvette

R	=		
R1	=	12.03	
R2	=		
R3	=		
r	=		

Chambre à poudre

E	=	3.85	
P1 ¹⁾	=	11.99	
P2 [*]	=	11.56	

Cône de raccordement

α ^{1)*}	=	40°	
S [*]	=	55.36	
r1 max	=	0.76	
r2	=	3.68	

Collet

H1 [*]	=	7.07	
H2 ¹⁾	=	7.04	

Prise de rayures


G1 ^{1)*}	=	6.26	
G ¹⁾	=	5.26	
α1	=	60°	
h [*]	=	0.68	
s	=		
i ^{1)*}	=	1°30'	
w	=		

Canon

F ^{1)*}	=	6.02	
Z ¹⁾	=	6.17	

Rayures

b	=	1.73	
N	=	6	
u	=	254.00	
Q	=	29.25	mm ²

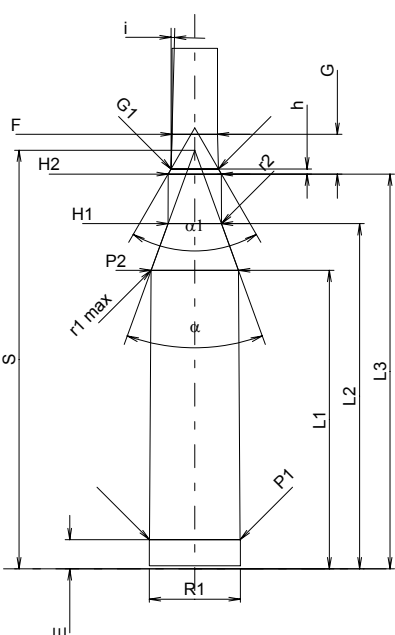

Échelle 1:1

Dimensions en << mm >>
Dimensions et tolérances pour les canons
d'épreuve: Voyez Annexe CR 1.

Notes: 1) A' contrôler pour la sécurité
* Dimensions de base